


HDR300-26


Payload 300Kgf

Installation method	
Floor	●
Ceiling	
Wall surface	


Application	
Spot welding	●
Arc welding	
Handling	●
Assembly	●
Sealing	
Painting	

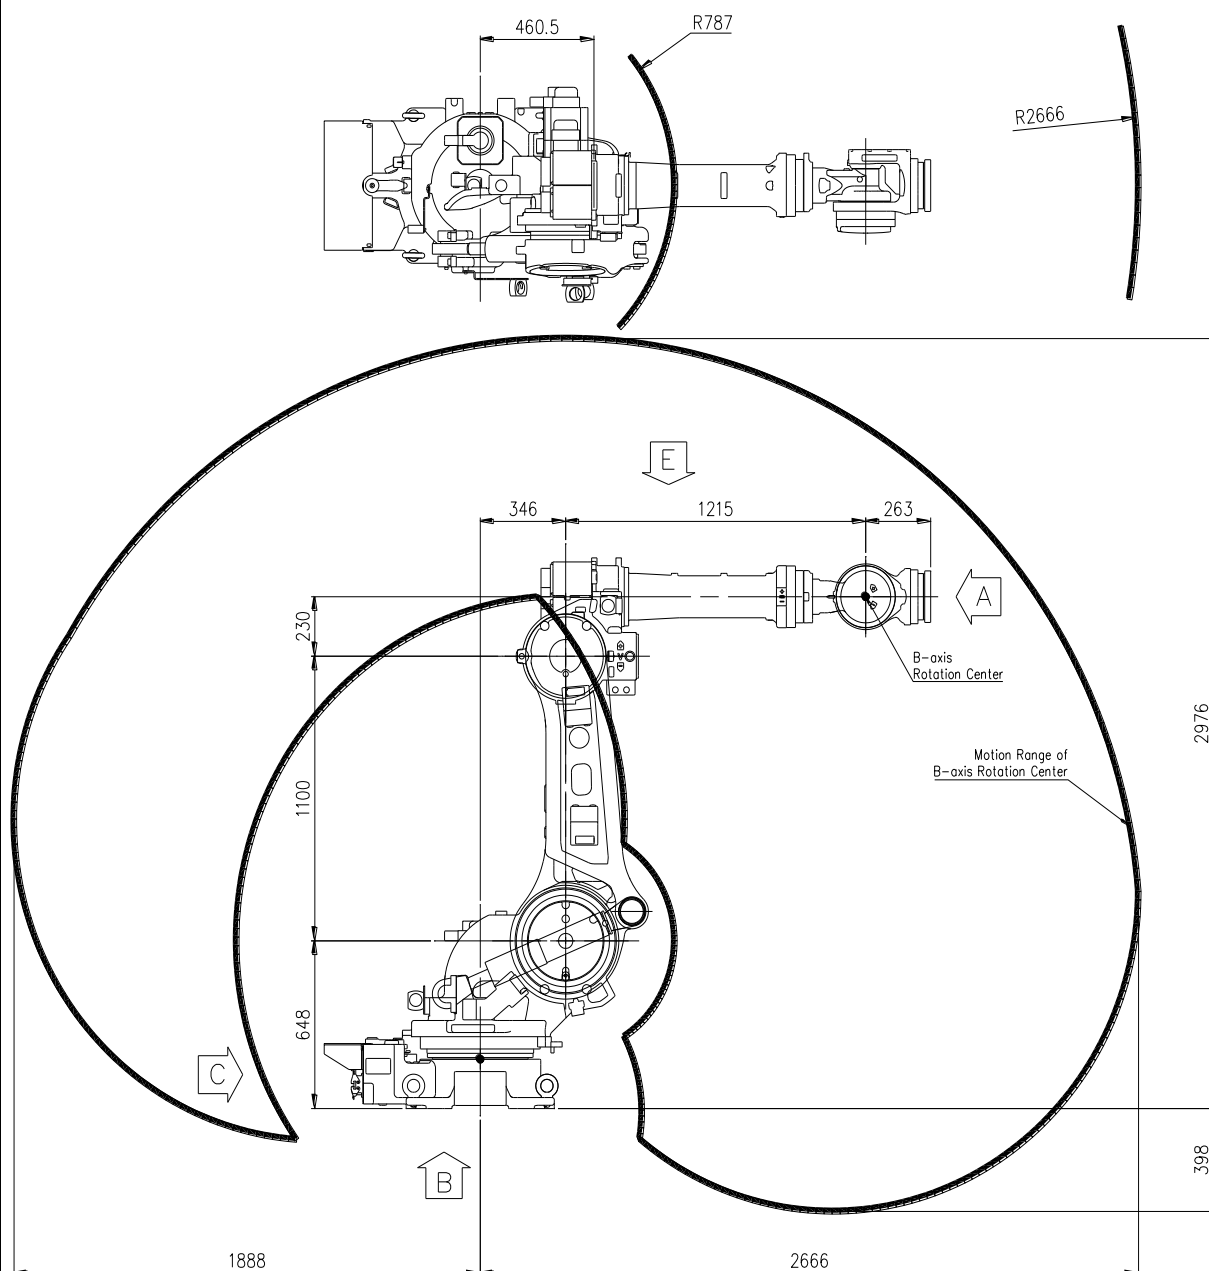

View A: Detailed drawing of the wrist attachment part

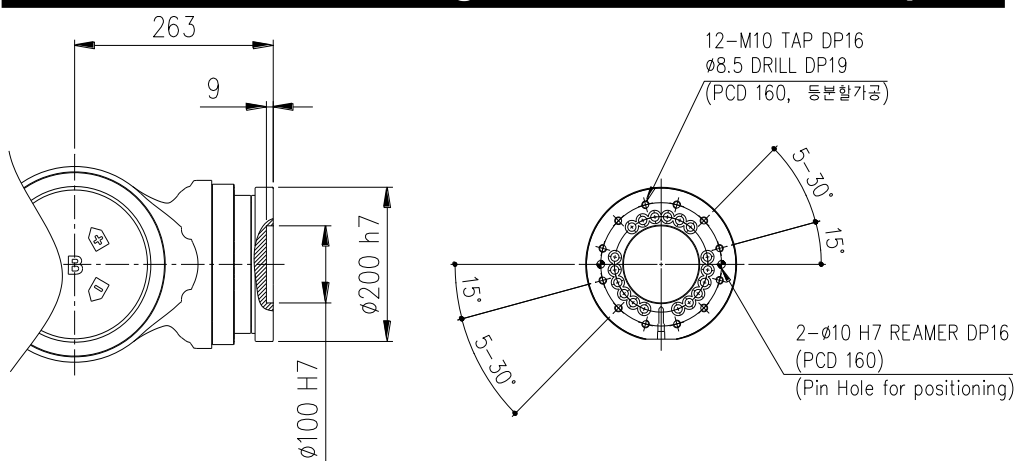


View B: Dimensional drawing for the floor installation of the body

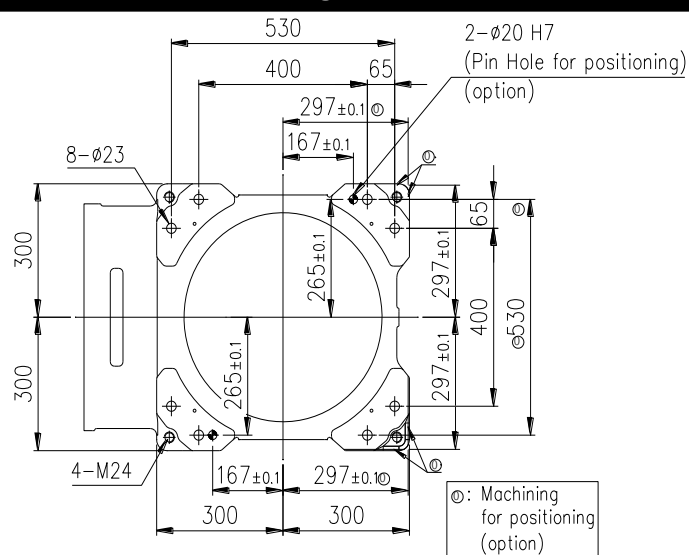


***) When the optional limit switch is attached, the action range of the main axis will be limited (see the manual)**

View C: Application cable connection part

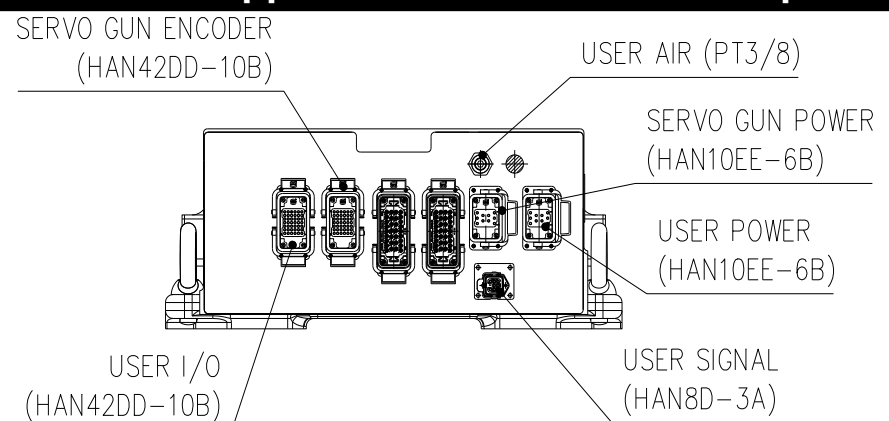


View D: Application cable connection part

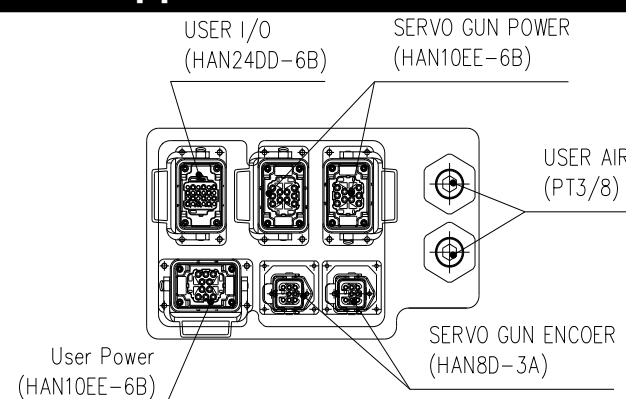

View E: Details of the application ancillary part attachment

Wrist-axis torque line diagram

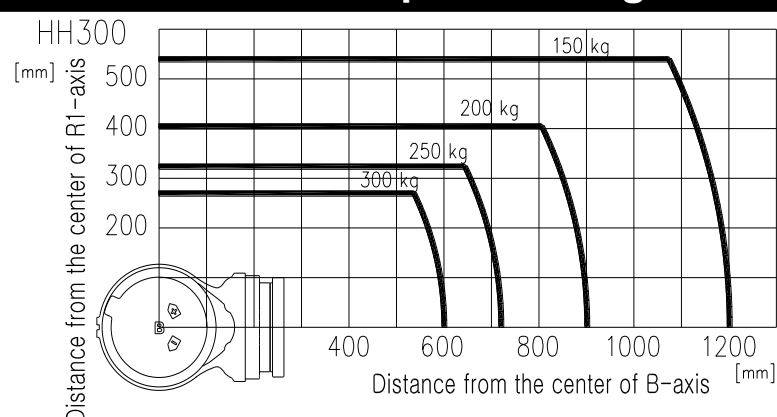

**** For product improvement, some of the ratings, specifications, dimensions, etc. are subject to changes without notice.**



Homepage : <http://www.hyundai-robotics.com>

Head Office : TEL. +82-1588-9997
 Ulsan Office : TEL. +82-53- 670-7055
 Jungbu Office : TEL. +82-41-534-4295
 Gwangju Office: TEL. +82-62-363-5272

A/S Center : TEL. +82-1588-9997