

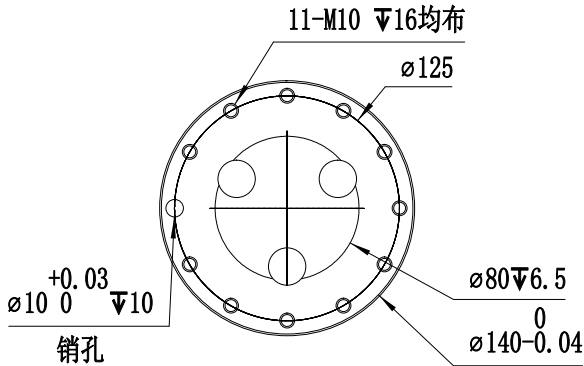
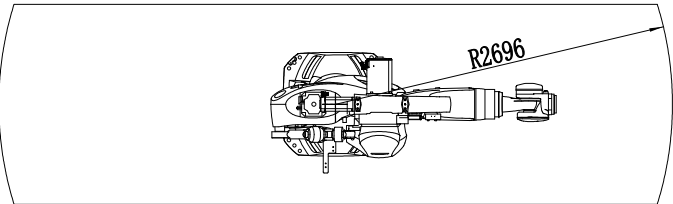


● CCR210-2700

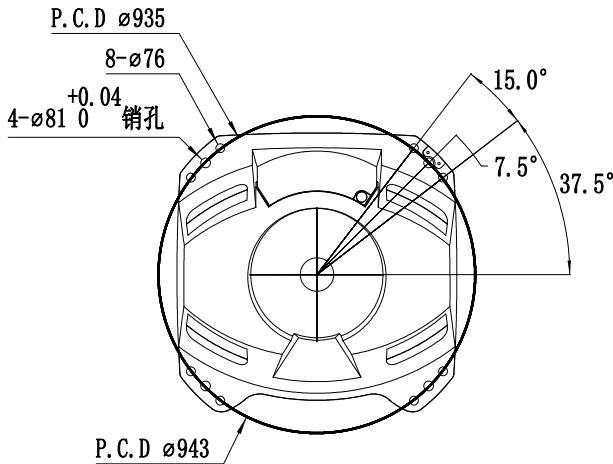

产品型号	Robot model	CCR210-2700
轴 数	Ttotal axes	6
负 载	Paylaod	210kg
重复定位精度	Position repeat accuracy	±0.1mm
最大单轴速度 Max speed	1轴axis 1 (底部旋转)	123° /s
	2轴axis 2 (大 臂)	115° /s
	3轴axis 3 (小 臂)	112° /s
	4轴axis 4 (手臂旋转)	179° /s
	5轴axis 5 (手臂摆动)	172° /s
	6轴axis 6 (手臂旋回)	219° /s
各轴运动范围 Max operating area	1轴axis 1 (底部旋转)	±185°
	2轴axis 2 (大 臂)	+50° / -85°
	3轴axis 3 (小 臂)	+210° / -65°
	4轴axis 4 (手臂旋转)	±350°
	5轴axis 5 (手臂摆动)	±125°
	6轴axis 6 (手臂旋回)	±350°
工作温度	Working temperature	0~45℃
安装方式	Installation parameters	地面支架安装
本体重量	Robot weight	1140kg
最大臂展	Maximum reach	2700mm
防护等级	IP Grade	IP54

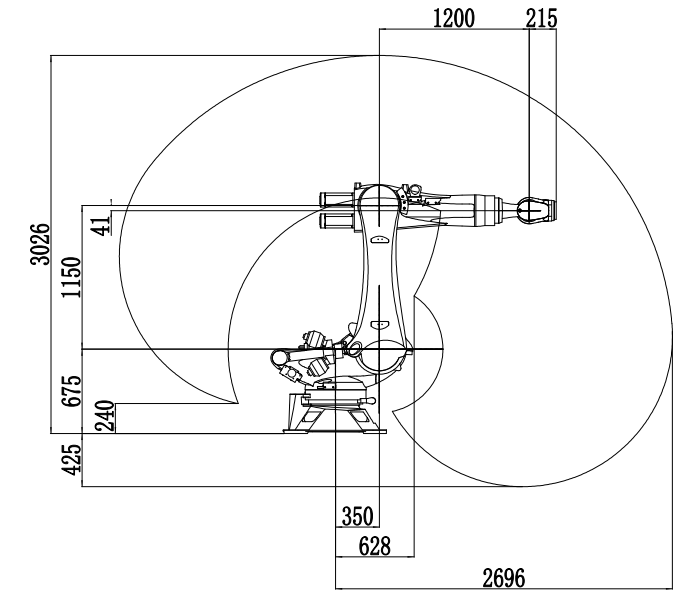

颜 色	白色	
重 量	170kg	
尺 寸	800*959*550mm	
防护等级	IP54	
额定电压	三相380V±10%	
电源频率	50/60Hz	
最大功率	13KW	
通讯协议	EtherCAT	
支持接口	HDMI、USB、TCP/IP、用户IO	
最大可控机器人台数	4	
工作 环境	温 度	0~55℃
	湿 度	20%-90%，无冷凝
	海 拔	1000m以下