


ER150-2700

ER150-2700,
Maxium payload 150 kg with maxium reach 2674 mm.

- **Highlights**
Thanks to the high stiffness structure, with high-speed intelligent palletizing application software, the takt is improved by 20%, bring customers more efficiency;
Multiple specific application software could be integrated, with soft PLC and a variety of field bus interface, which enable customers easily face various application challenges;
High performance collision detection function helps safety realization.

- **Applications**
It can be used in Spot welding, SW-Stud welding, handling operations, cell changing disc and group disc, palletizing, assembling, grinding, polishing, etc.

- **Industries**
Suitable for lithium cell, auto parts, photovoltaic, food and beverage, building materials, logistics and warehousing and other industries.

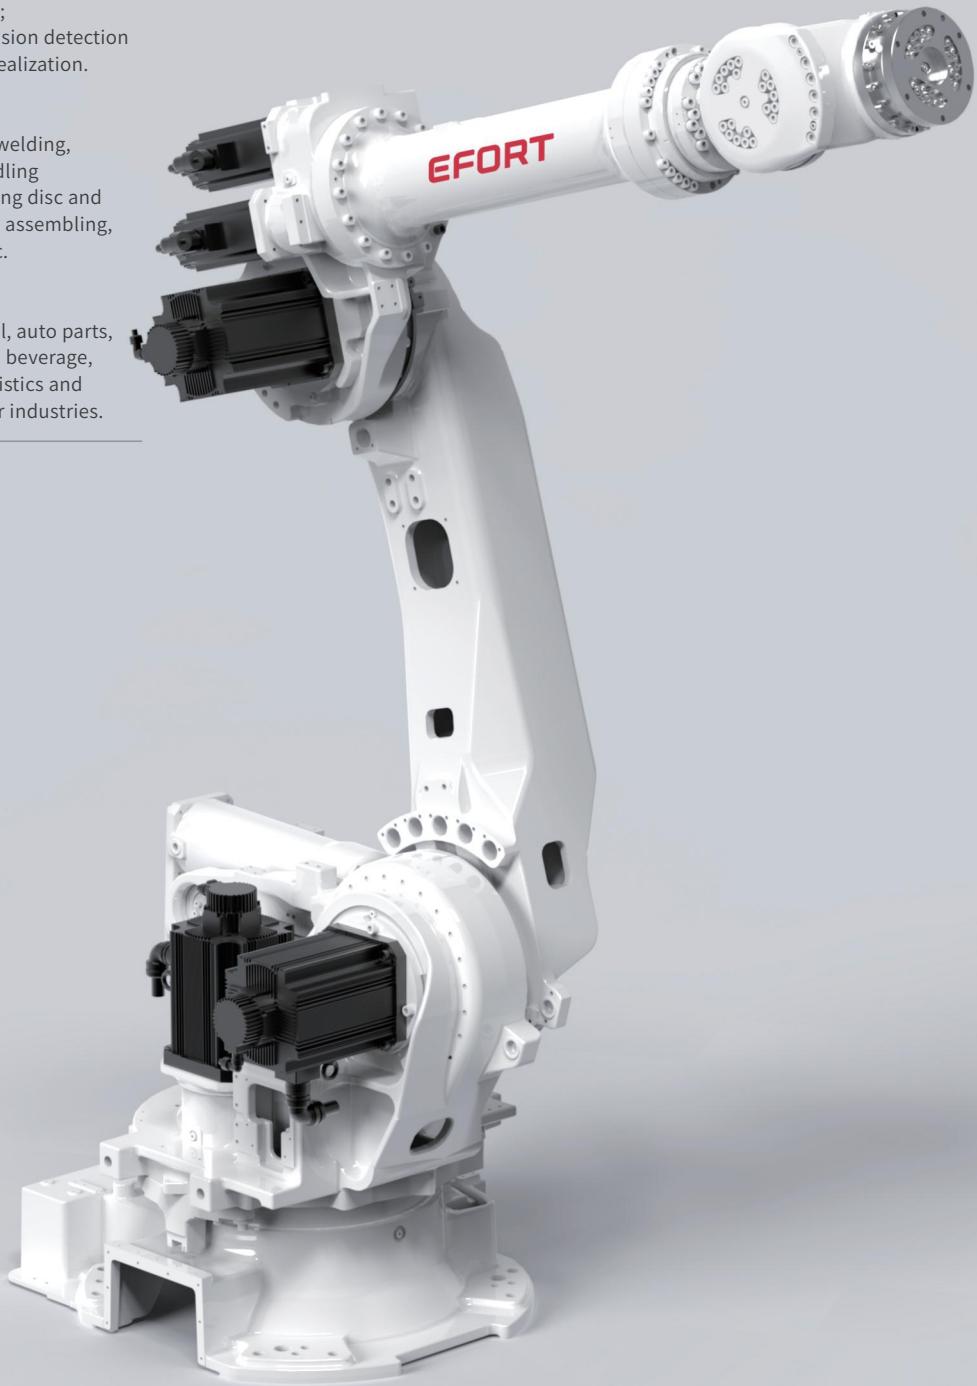

EFORT Intelligent Robot Co., Ltd.
PHONE: (00 86) 400-052-8877
ADDRESS: No. 96, Wanchun East Road, Wuhu, China
(Anhui) Pilot Free Trade Zone
WWW.EFORT.COM.CN


EFORT

SPECIFICATIONS


Model		ER150-2700
Type		Articulated
Controlled axes		6 Axes
Max. payload on wrist		150 kg
Repeatability		±0.05 mm
Robot weight		1110 kg
Reach		2674 mm
Robot IP grade		IP65
Cabinet IP grade		IP54
Drive mode		AC servo drive
Installation		Floor
Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)

Allowable load moment at wrist	J4	1337 N•m
	J5	1337 N•m
	J6	720 N•m
Allowable load inertia at wrist	J4	141.1 kg•m ²
	J5	141.1 kg•m ²
	J6	79 kg•m ²
Maximum speed	J1	110°/sec
	J2	100°/sec
	J3	105°/sec
	J4	120°/sec
	J5	110°/sec
	J6	220°/sec
Motion range	J1	±180°
	J2	+60°/-80°
	J3	+90°/-83°
	J4	±360°
	J5	±120°
	J6	±360°


OPERATING SPACE

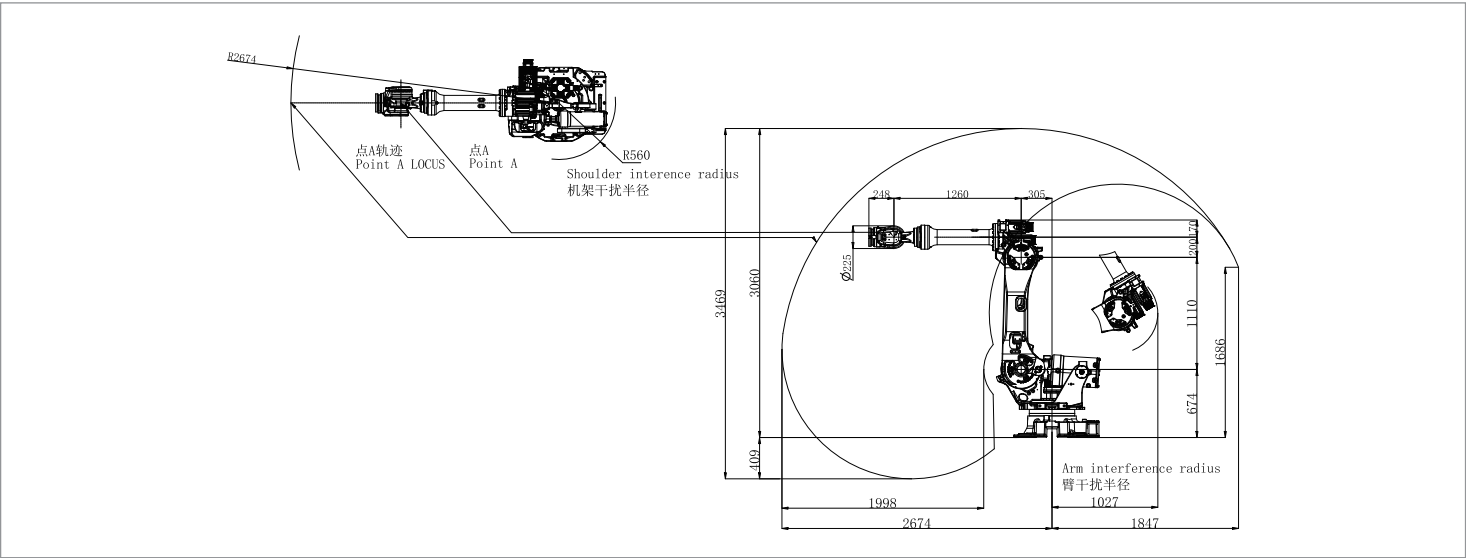

BASE MOUNTING SIZE

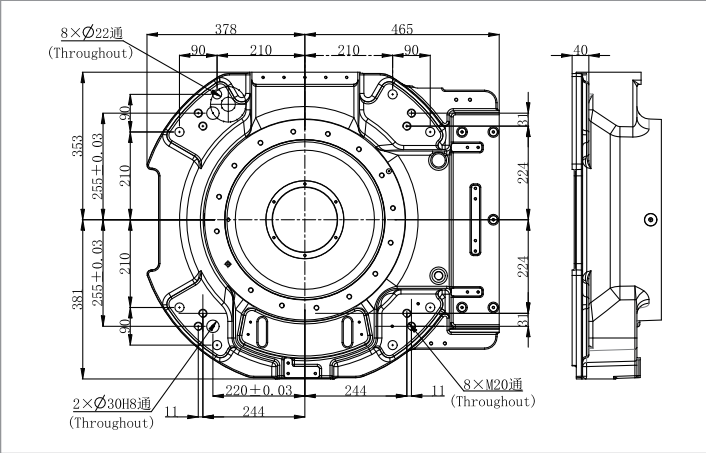

END FLANGE MOUNTING SIZE

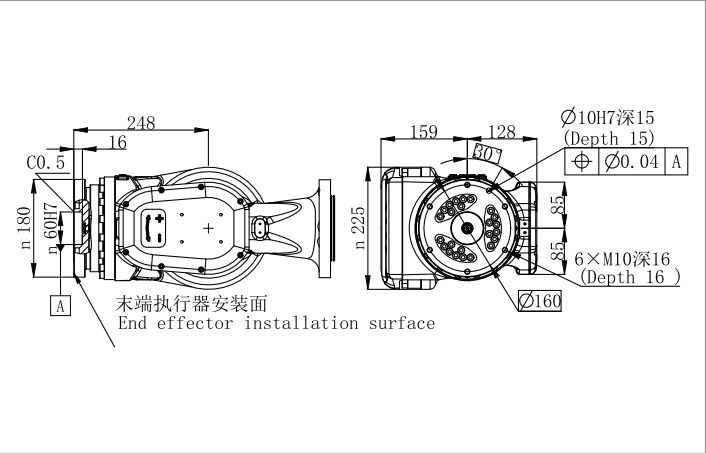

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice.