

ER210-3100


ER210-3100PL,
Maxium payload 210 kg with maxium reach 3098 mm.

- Highlights

The all-new heavy-duty platform product features fully rigid gear connections on all axes, delivering superior robot wrist torque performance. With a 50% improvement in repeat positioning accuracy, leading its class, the robot is capable of handling various high-precision applications. Combining a high-rigidity transmission design with advanced trajectory algorithms, it demonstrates enhanced dynamic performance and ensures stable high-speed operation.
- Applications

Applicable to scenarios such as loading and unloading, handling and palletizing.
- Industries

Suitable for fields like automotive, lithium battery & photovoltaic, food and beverage, building materials, and warehousing & logistics.

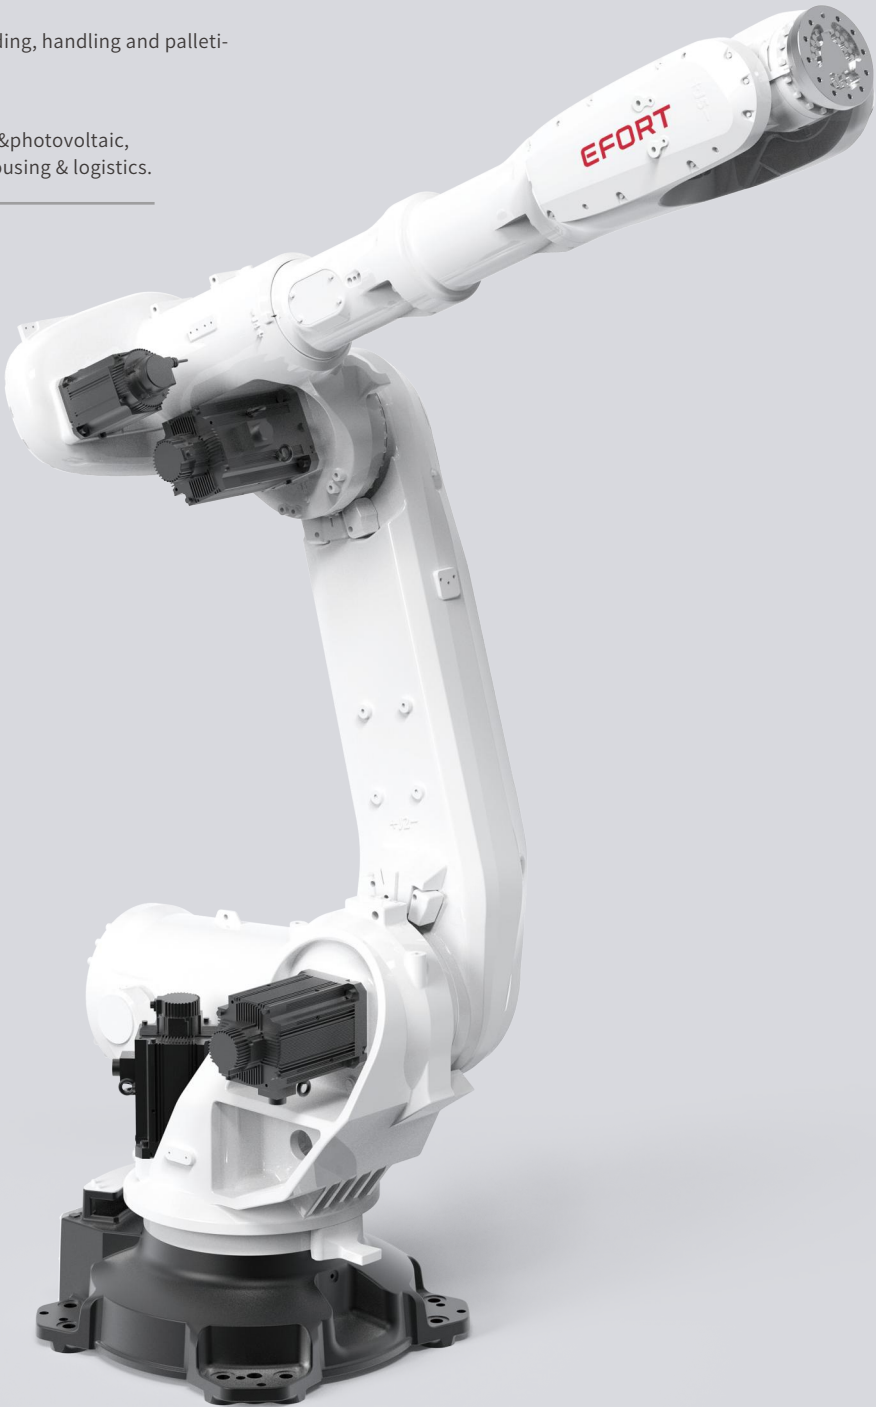

EFORT Intelligent Robot Co., Ltd.
PHONE: (0086) 400-052-8877
ADDRESS: No.96 East Wanchun Road, China(Anhui) Pilot
Free Trade Zone Wuhu Area, Wuhu, Anhui Province, China
WWW.EFORT.COM.CN


EFORT

SPECIFICATIONS


Model		ER210-3100
Type		Articulated
Controlled axes		6 Axes
Max. payload on wrist		210 kg
Repeatability		±0.05 mm
Robot weight		1340 kg
Reach		3098 mm
Robot IP grade		IP65/IP67 (Wrist)
Cabinet IP grade		IP54
Drive mode		AC servo drive
Installation		Floor
Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)

Allowable load moment at wrist	J4	1400 N·m
	J5	1400 N·m
	J6	745 N·m
Allowable load inertia at wrist	J4	180 kg·m ²
	J5	180 kg·m ²
	J6	85 kg·m ²
Maximum speed	J1	130°/sec
	J2	110°/sec
	J3	115°/sec
	J4	170°/sec
	J5	120°/sec
	J6	220°/sec
Motion range	J1	±185°
	J2	+65°/-85°
	J3	+180°/-70°
	J4	±360°
	J5	±130°
	J6	±360°


OPERATING SPACE

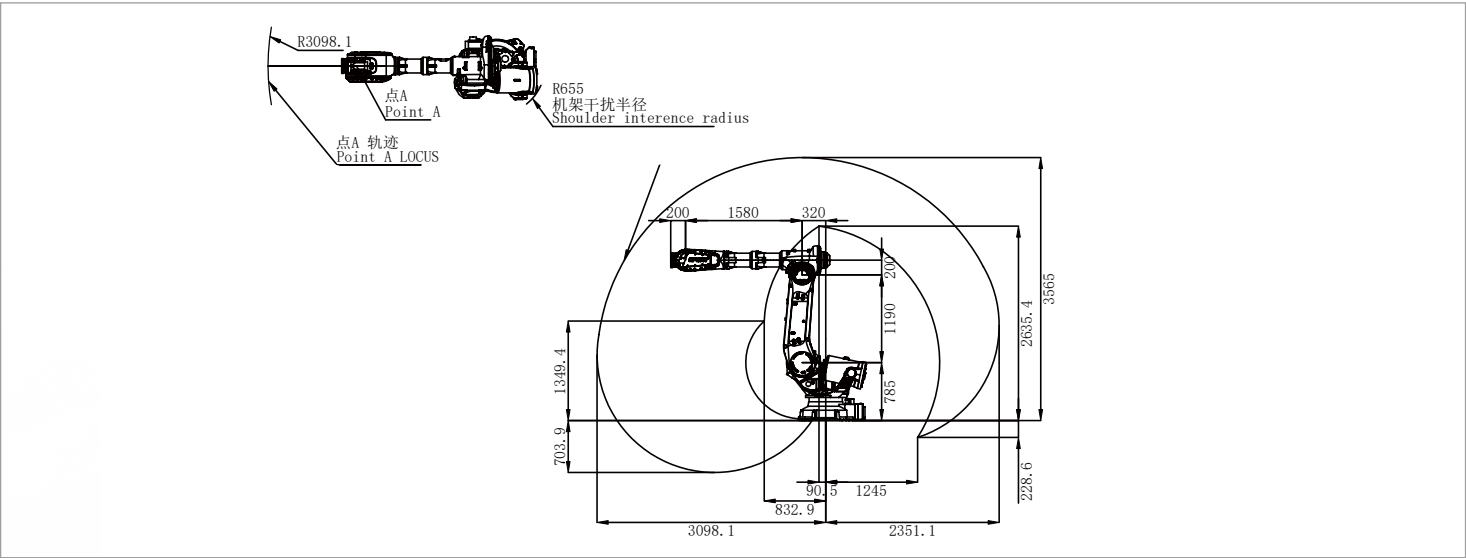

BASE MOUNTING SIZE

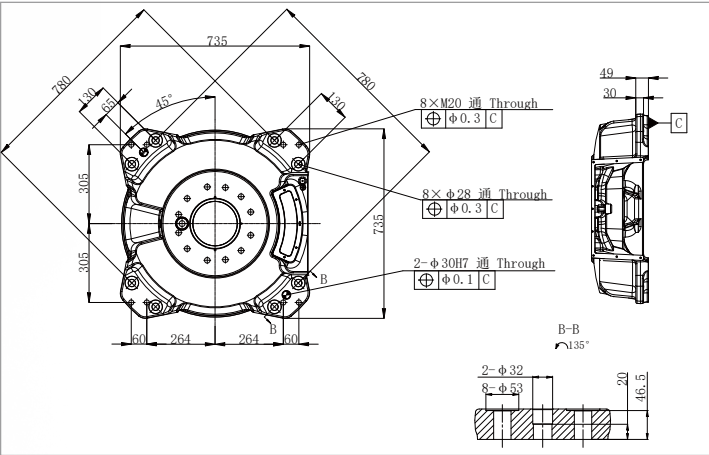

END FLANGE MOUNTING SIZE

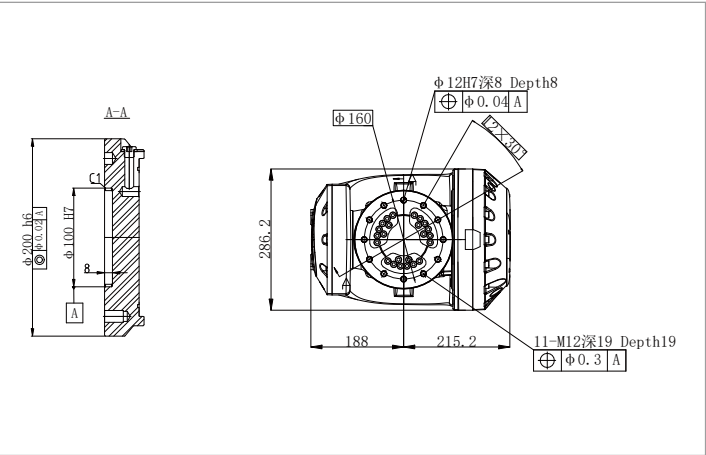

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice. Information Release Time 2026/06