



灵活部署, 广泛应用
操作简单, 价值投资
同时具有高兼容性和易操作性

Flexible deployment, Widely used, Simple operation, Value investing
High Compatibility, Operability

Palletizing Robot Workstation 码垛机器人工作站

多场景 + 深度融合工业机器人平台 | 45 年历史的工业机器人专家

TURIN
创新驱动未来 Innovation Driving the Future

上海图灵智造机器人股份有限公司
Shanghai Turin Smart Robot Co., Ltd.

电话 | 400-778-9969 (24小时客服热线)
邮箱 | info@turinrobot.com
网址 | www.turinrobot.cn
地址 | 上海市宝山区湄浦路361弄3号楼(总部)
上海市嘉定区汇源路66号7幢(联合研发中心)
江苏省海安市城东镇和顺路68号5栋、8栋(生产制造基地)
广东省深圳光明区新湖街道云智科技园B2栋802(深圳分公司)
山东省烟台市福山区北京南路东方工业园二期(烟台分公司)



灵活部署Flexible deployment

快速安装、便捷移动，多种场景快速切换；集成设计，占地面积小。
Quick installation, convenient mobility, and quick switching between multiple scenarios; Integrated design with small footprint.

广泛应用Widely used

广泛应用于快消品（护理品、品牌包装、食品饮料烟酒）、医药、3C等行业。
Widely used in industries such as fast-moving consumer goods (care products, brand packaging, food and beverage, tobacco and alcohol), pharmaceuticals, 3C, etc.

操作简单Simple operation

可视化编程，全中文界面；普通员工可在1小时内掌握编程；标准化码垛程序，只需四步即可完成新任务程序设置。
Visual programming, all Chinese interface; Ordinary employees can master programming within 1 hour; Standardized palletizing program, new task program setup can be completed in just four steps.

价值投资Value investing

平均6-12个月回本；其快速部署和多场景应用特点，可在多品类产品和淡旺季中轻松切换，可将员工从繁重的搬运工作中解放，提高工厂智能化程度。
Average 6-12 months of return on capital ;Its fast deployment and multi scenario application features allow for easy switching between multiple product categories and peak and low seasons; Can liberate employees from heavy handling work and improve the level of factory intelligence.


TPW20 产品参数TPW20 parameters

型号 Model	TPW20
负载 Load	20kg
工作半径 Working radius	1650mm
最大托盘尺寸 Maximum tray size	1200*1200
码垛高度 Stacking height	2100mm
码垛速度 Palletizing speed	8-10 箱 /min
额定电压 Rated voltage	单相 220V
工作气压 Working air pressure	>0.5Mpa
IP等级 IP rating	IP54


TPW30 产品参数TPW30 parameters

型号 Model	TPW30
负载 Load	30kg
工作半径 Working radius	1800mm
最大托盘尺寸 Maximum tray size	1200*1200
码垛高度 Stacking height	2200mm
码垛速度 Palletizing speed	8-10 箱 /min
额定电压 Rated voltage	单相 220V
工作气压 Working air pressure	>0.5Mpa
IP等级 IP rating	IP54

行程范围Travel Range

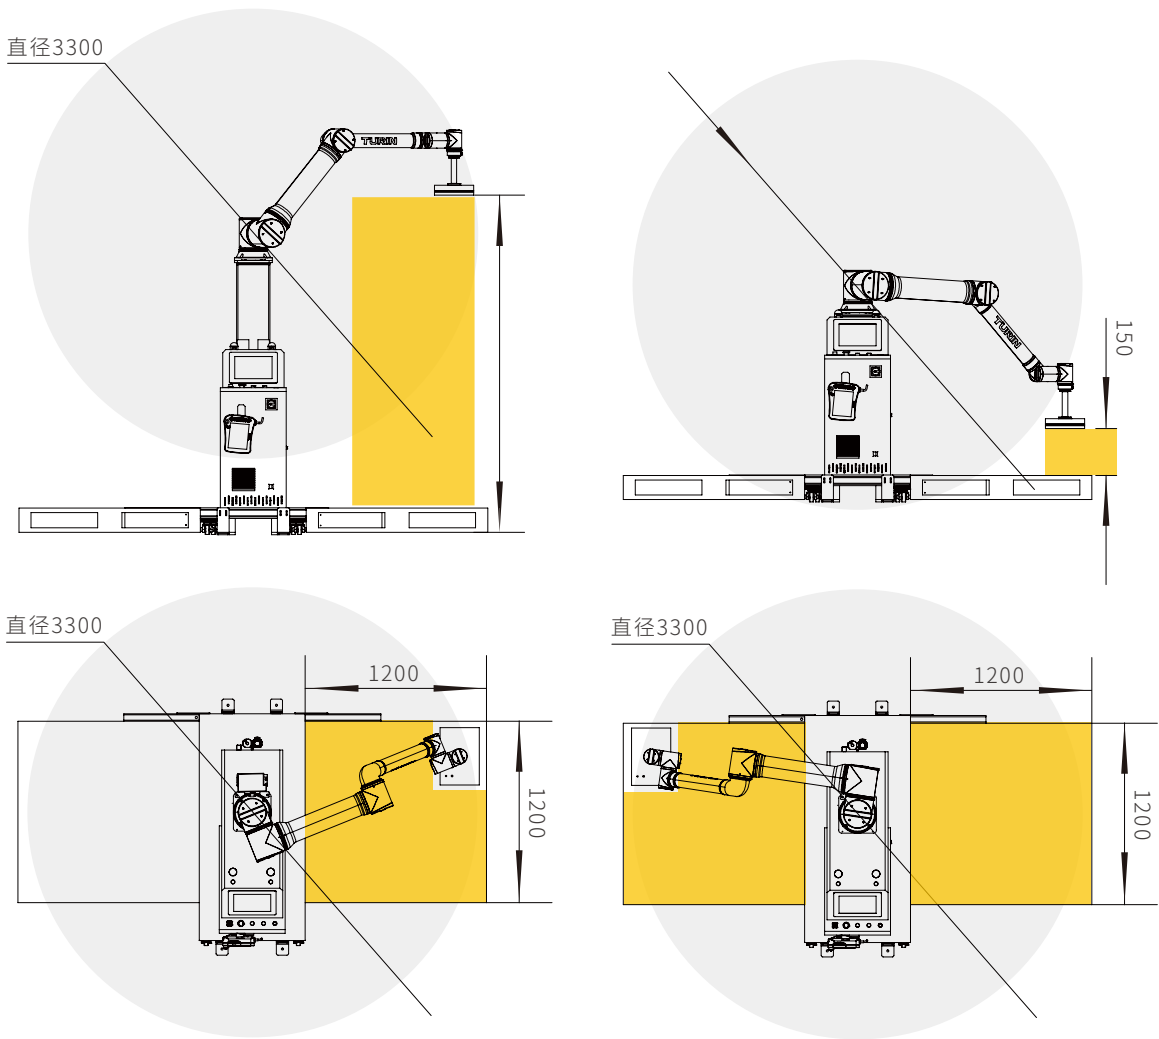

行程范围Travel Range

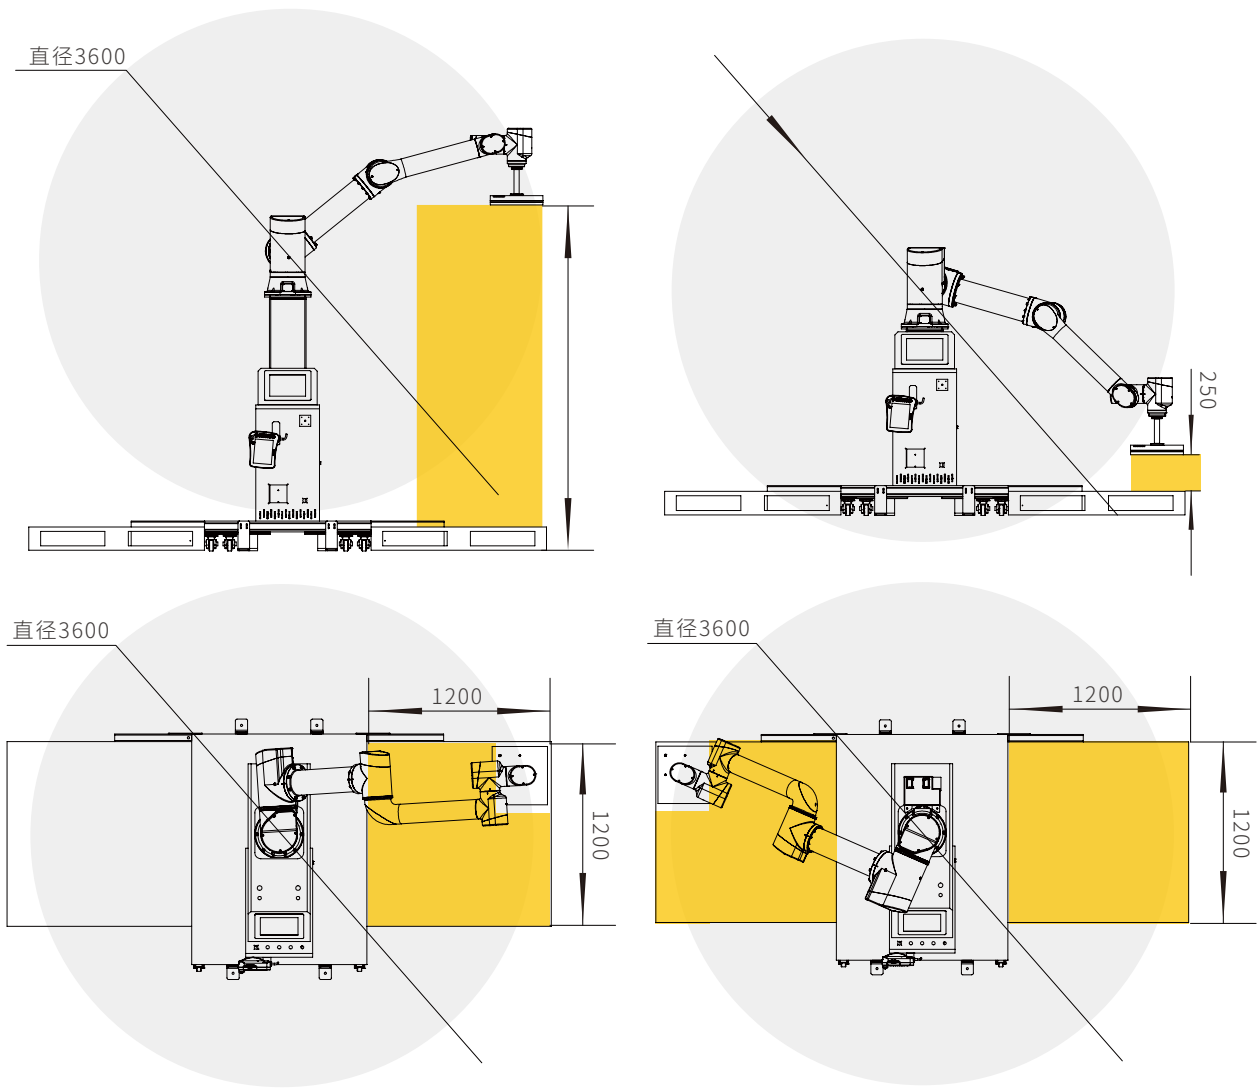

高兼容性

High Compatibility

- 大臂展，可覆盖多种托盘尺寸
Large arm extension, capable of covering various pallet rulers.
- 只需创建一个程序，便可容纳多种产品垛型
Simply create a program that can accommodate multiple product stack types.

易操作性

Operability

- 四步轻松完成码垛布置
Easy stacking arrangement in four steps
 - 1、设置箱子尺寸
Set box size
 - 2、设置栈板尺寸
Set pallet size
 - 3、设置码放样式
Set stacking style
 - 4、来料位置设定
Incoming material position setting