




Charging station

PD04C

- The 7-inch LCD screen displays the charge status
- Air switch, short-circuit self-protection
- Intelligently dispatched by RCS and charged independently
- The height of charge station is 280mm, more adaptable
- On-screen network configuration and easy to operate
- Reserved battery communication
- Intelligent temperature detection of charge contract
- Compatible with alliance protocol/V5050 protocol/blind charge

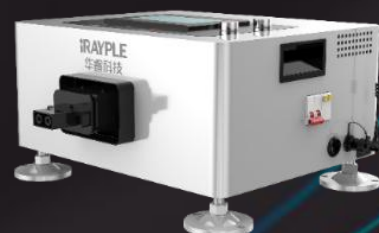

General dimensions

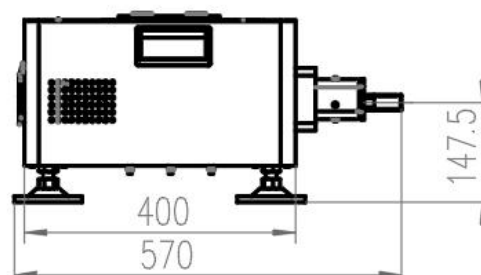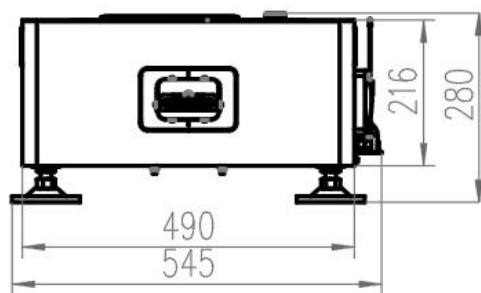

Parameter

Model	RTP-4830-1-520
Dimension L*W*H (mm)	545*570*280
Weight (kg)	24
Input voltage (V)	110~220
Input current (A)	18
Output voltage (V)	48
Output current (A)	30
Output power (KW)	1.7
COM mode	802.11b/g/n/ac
Charging mode	Automatic/manual
Working Temp.	0-40°
Working Humidity	5-95%

Zhejiang HuaRay Technology Co., Ltd.

- No.590 Chang 'he Road, Binjiang District, Hangzhou, China
- <https://www.irayple.com/en/home>
- 400-681-8858 · overseas@irayple.com

※ This page will strive to provide accurate information to the best of its ability, but errors may still exist. The information is for reference only. In the event of updates to product information, no separate notifications will be given, and our company will not be held responsible for any resulting liabilities.



Website



LinkedIn



Facebook



YouTube

20240508